

CONTENTS

1. SPECIFICATIONS	2
2. PREPARATION FOR START	3
1. Oiling	3
2. Needle Setting	3
3. Threading	3
3. START	4
4. ADJUSTMENTS	5
1. Thread Tension	5
2. Position of Needle and Looper	5
3. Position of Feed Dog	5
4. Pressure of Presser Foot	5
5. REPLACING PARTS	6
6. MAINTENANCE & LUBRICATION	7
7. LUBRICATOR	7
1. Operation	7
2. Maintenance	7
3. Troubleshooting	8
8. ORDERING PARTS	9
NUMERICAL INDEX OF PARTS	26
DIAGRAM OF SCREW, NUT & WASHER	28

EAGLE PARTS &
MACHINERY, INC.
Chatsworth, GA 30705
Phone (706) 695-8637
Part # JM-7A

1. SPECIFICATIONS

TECHNICAL DETAILS

Speed(sec/bag)	5 - 6
Seam	Single Thread Chain Stitch
Stitch Range(mm.)	8.5 (fixed)
Revolution(rpm.)	1,600±125
Needle	DNx1 - #25
Thread(vinylon,synthetic or cotton)	20/6
Drive Motor	60W
Power Supply	110, 220, 230 or 240V., A.C. 12V,24V.,D.C.(specify one.) 50 - 60Hz,Single Phase
Net Weight(kg)	5.2 Including Thread Cone,Shoulder Belt.
Machine Dimension(mm.)	360(L)×245(W)×315(H)
Packing Dimension(cft.)	2.5

STANDARD ACCESSORIES

1. Needles DNx1-#25. 5 pcs.
2. Thread Vinylon 20/6 1 roll
3. Screw Driver 1 pce.
4. Needle Bar Spanner 1 pce.
5. Oil 1 can
6. Carbon brush 2 pcs.

2. PREPARATION FOR START

1.Oiling (Fig.1)

Oiling is imperative to keep the machine in good operating condition. Fill oil in the reservoir(capacity 45 cc). To feed oil, push the button of the lubricator. One push feeds 0.08 cc of oil, which would normally service for several hours of operation. Do not run the machine out of oil, otherwise it will break down.

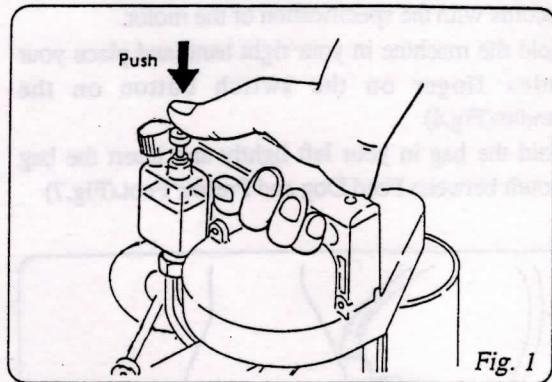


Fig. 1

2.Needle Setting (Fig.2, 3, 4)

Turn the pulley until Needle Bar reaches its highest position. Loosen Needle Bar Clamping Nut, and set Needle in the Bar as deep as it will go.

Be sure to set a Needle with its concave part facing correctly toward the Looper. Fix Clamping Nut tightly, otherwise Needle may come loose during operation and break.

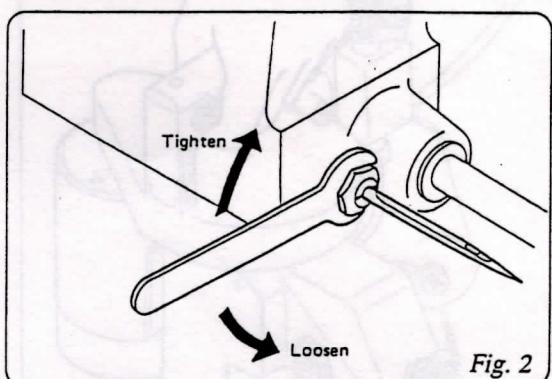


Fig. 2

3.Threading(Fig.5)

The machine is delivered being threaded to show you proper threading of the machine, which is shown in Fig.5, for identification. Follow the guide numbers 1 to 7 of Fig.5.

- | | |
|-------------------|----------------|
| ①, ②Thread Eyelet | ⑤Needle Bar |
| ③Tension Disc | ⑥Thread Eyelet |
| ④Thread Eyelet | ⑦Needle |

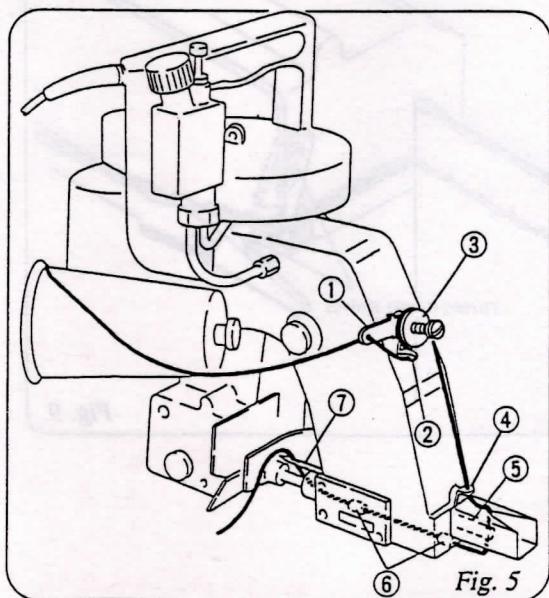


Fig. 5


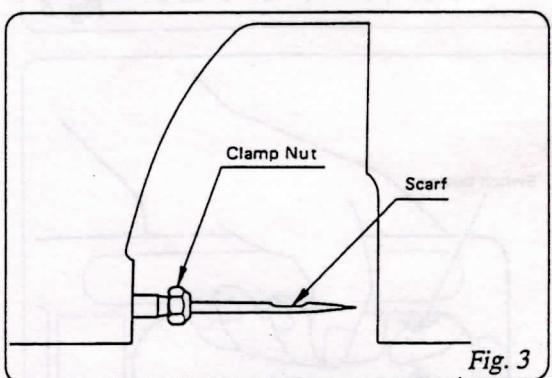


Fig. 3

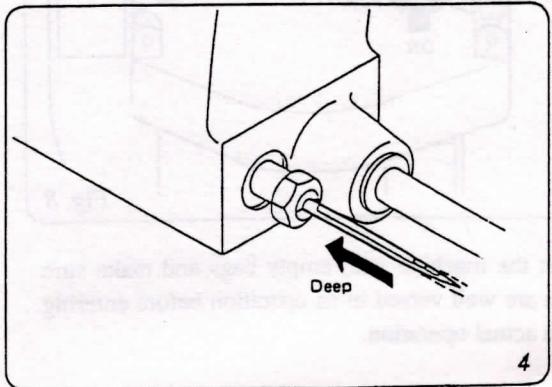

4

3 . START

Before starting, make sure that the supply voltage accords with the specification of the motor.





Hold the machine in your right hand and place your index finger on the switch button on the handle.(Fig.6)

Hold the bag in your left lightly and insert the bag mouth between Feed Dog and Presser Foot.(Fig.7)

Run the machine while keeping the bag straight.
Never pull or pull back the bag.

After closing, the thread is cut by the built-in nibbler type cutter.

When cutting the thread, leave at least 3 cm long extended tail to prevent the unwilling loosening of the seam.(Fig.9)

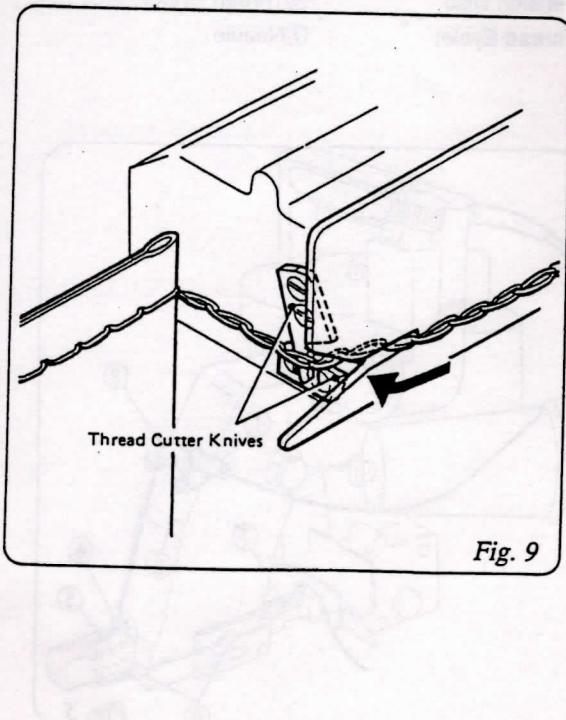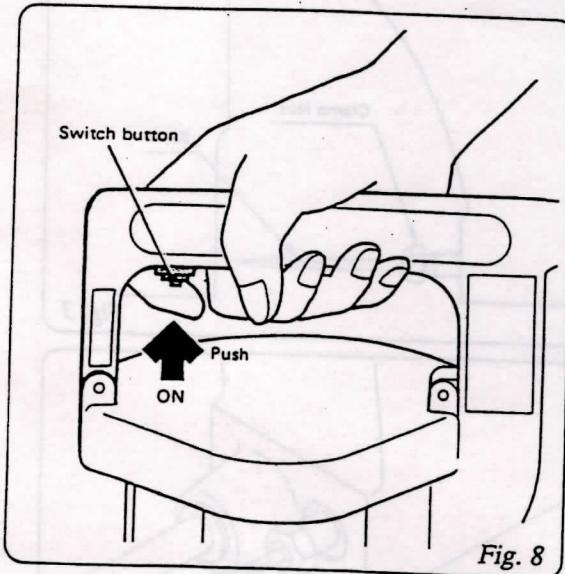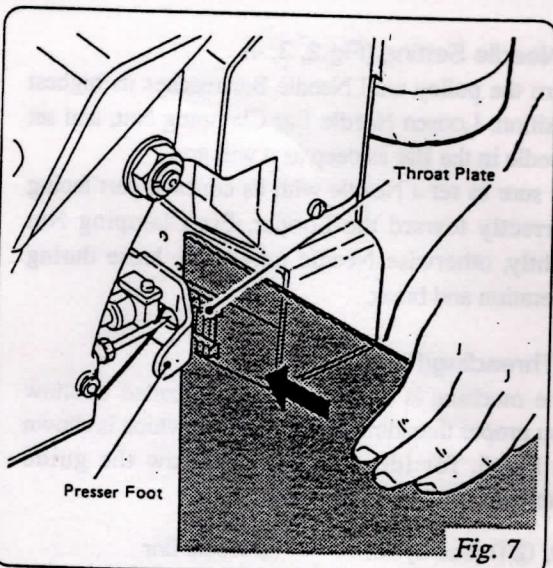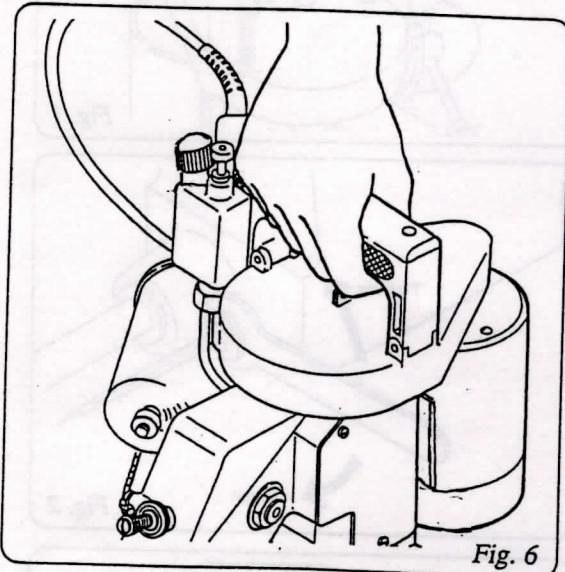

Run the machine with empty bags and make sure you are well versed in its operation before entering into actual operation.

4 . ADJUSTMENTS

1.Thread Tension

Thread tension is adjustable by turning the Thread Tension Nut.

Turn the Nut clockwise for tighter tension and counter-clockwise for looser.

2.Position of Needle and Looper (Fig.10)

Looper must pass the concave part of Needle with clearance of 0.1 mm as shown in Fig.10. Adjustment of the clearance can be done after loosening the screw of Looper Rocker.

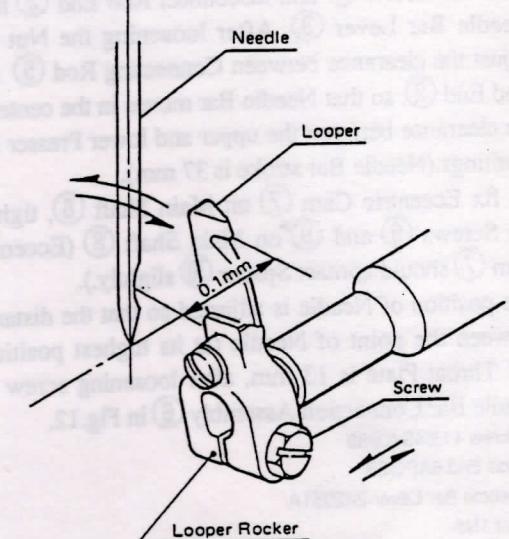


Fig. 10

3.Position of Feed Dog

Feed Dog should be 2.5 mm above throat plate at its highest position as shown in Fig.11. The height of Feed Dog is determined by the height of Feed Dog Support Screws(4 pcs.in all).

4.Pressure of Presser Foot

When to adjust the pressure of Presser Foot, take out Needle Bar Guard and loosen Screw of Presser Bar Connection. Move up Presser Bar to increase the pressure and down to decrease. After the adjustment, tighten the Screw firmly.

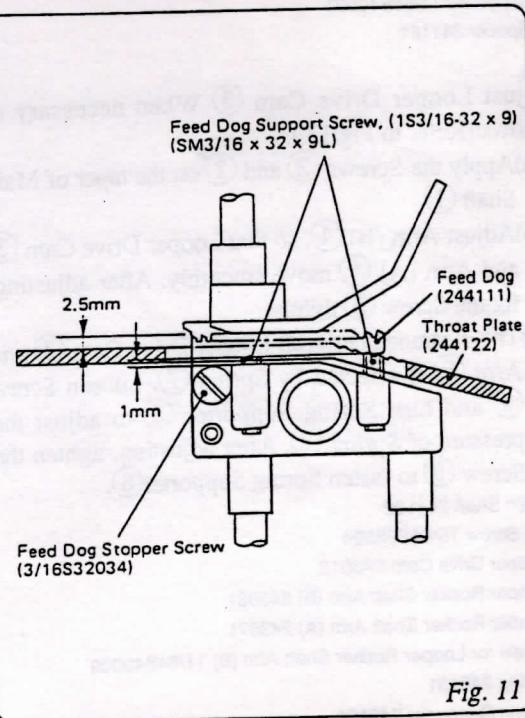


Fig. 11

5. REPLACING PARTS

For replacement or adjustment of Ball Rod, refer to Fig.12.

Take out Screw ① and disconnect Rod End ② from Needle Bar Lever ③. After loosening the Nut ④, adjust the clearance between Connecting Rod ⑤ and Rod End ②, so that Needle Bar moves in the center of the clearance between the upper and lower Presser Bar Bushings.(Needle Bar stroke is 37 mm).

To fix Eccentric Cam ⑦ on Main Shaft ⑧, tighten the Screws ⑨ and ⑩ on Main Shaft ⑧ (Eccentric Cam ⑦ should contact Spacer ⑩ slightly.).

The position of Needle is adjusted so that the distance between the point of Needle (at its highest position) and Throat Plate is 13 mm, after loosening screw on Needle Bar Connection Assembly ⑥ in Fig.12.

- ① Screw 11/64S40089
- ② Rod End 6APOS8
- ③ Needle Bar Lever 242051A
- ④ Nut 1N8
- ⑤ Connecting Rod Assembly 242011A
- ⑥ Needle Bar Connection Assembly 242101A
- ⑦ Eccentric Cam (part of Connecting Rod Assembly) 242011
- ⑧ Main Shaft 241101
- ⑨ Screw 11/64S40001
- ⑩ Spacer 241161

Adjust Looper Drive Cam ③ When necessary as follows:(Refer to Fig.13.).

- Apply the Screws ② and ③ on the taper of Main Shaft ①.
- Adjust Arm (B) ④, so that Looper Drive Cam ③ and Arm (A) ⑤ move smoothly. After adjusting, fix the Screw ⑥ tightly.
- The clearance between Looper Drive Cam ③ and Arm ⑤ is effected by Spring ⑦. Loosen Screw ⑨ and turn Spring Supporter ⑧ to adjust the pressure of Spring ⑦. After adjusting, tighten the Screw ⑨ to fasten Spring Supporter ⑧.

- ① Main Shaft 241102
- ② ③ Screw 15/64S28524
- ③ Looper Drive Cam 243012
- ④ Looper Rocker Shaft Arm (B) 243081
- ⑤ Looper Rocker Shaft Arm (A) 243071
- ⑥ Screw for Looper Rocker Shaft Arm (B) 11/64S40009
- ⑦ Spring 243131
- ⑧ Spring Supporter 243121
- ⑨ Screw for Spring Supporter Block 11/64S40003

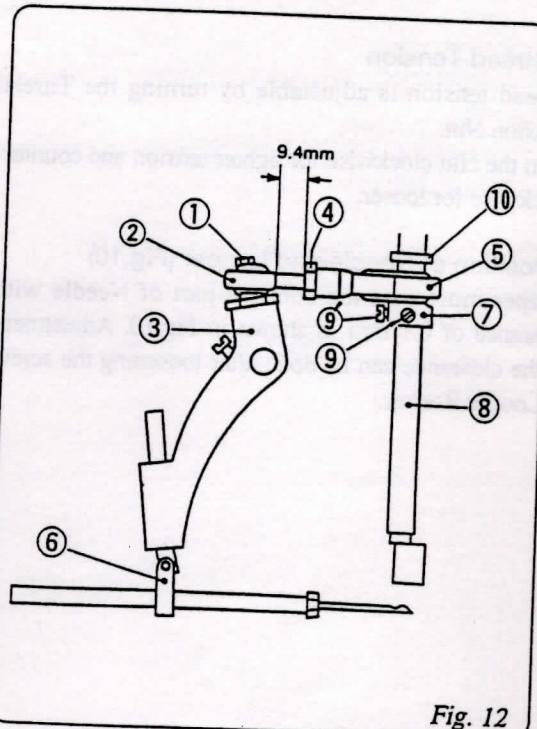


Fig. 12

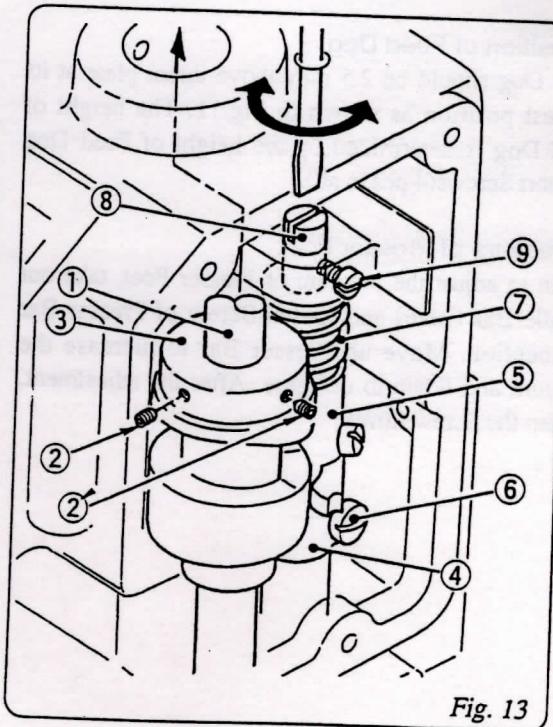


Fig. 13

6. MAINTENANCE & LUBRICATION

Clean the machine at the end of the day's work. Wipe dust and other foreign matter off the Feed Dog teeth Looper and Throat Plate eyelets where they are easily gathered.

Care should be taken to keep the machine free from rust, especially when to leave it unused for some time.

Recommended lubricants are Shell X-100, Motor Oil 10W/30, Shell Vitria Oil 31 or the equivalent. For operation and maintenance of the lubricator, refer to Section 7.

Important!

When adjusting the machine or replacing parts, always disconnect the Electric Cord from the power source. This is important in view of safety to the operator and adjuster.

7. LUBRICATOR

1. Operation

The lubricator comprises a pump and a reservoir. The reservoir holds max 45 cc of oil. (Effective oil volume is 28 cc.)

To operate the lubricator:

1. First unscrew the reservoir cap by half a turn.*
2. Push the button to its lowest position (stroke: 12mm).
3. When released, the button will automatically return to its original position.
4. Lastly, tighten the cap to prevent oil leak during operation.

* Repeated working on the button without first loosening the cap may produce negative pressure in the reservoir, and the dust in the atmosphere may be easily introduced in it when the cap is loosened.


2. Maintenance

1. Keep off dust or foreign matter when to fill oil (They may cause jamming of the piston and the check valve).
2. Rate of discharge is fixed and not adjustable (0.08cc per push).
3. At high temperatures, grease may run along points
Ⓐ. This is normal, grease being used when the lubricator was assembled in our plant.
4. Reservoir is made of high density polyethylene. Keep off fire and refrain from using organic, benzene, or xylene chemicals for cleaning. Check periodically for correct working of the pump. (Repeat oil feed and look at the oil through the discharge pipe.)

3. Troubleshooting

Trouble	Cause	Remedy
Oil not fed.	Low oil level.	Fill oil.
Full stroke movement not obtainable.	Dust attached on the interior wall of the pumping chamber.	Replace lubricator.
Button will not return.	Dust accumulated, or break of spring.	Replace lubricator.
Oil leak from A	Wornout or displaced seal of O-Ring.	Replace lubricator.
Oil leak from B	Wornout or displaced seal of packing.	Replace lubricator.
Oil leak from C	Loose plug.	Tighten plug or Replace lubricator.

PUSH-BUTTON LUBRICATOR

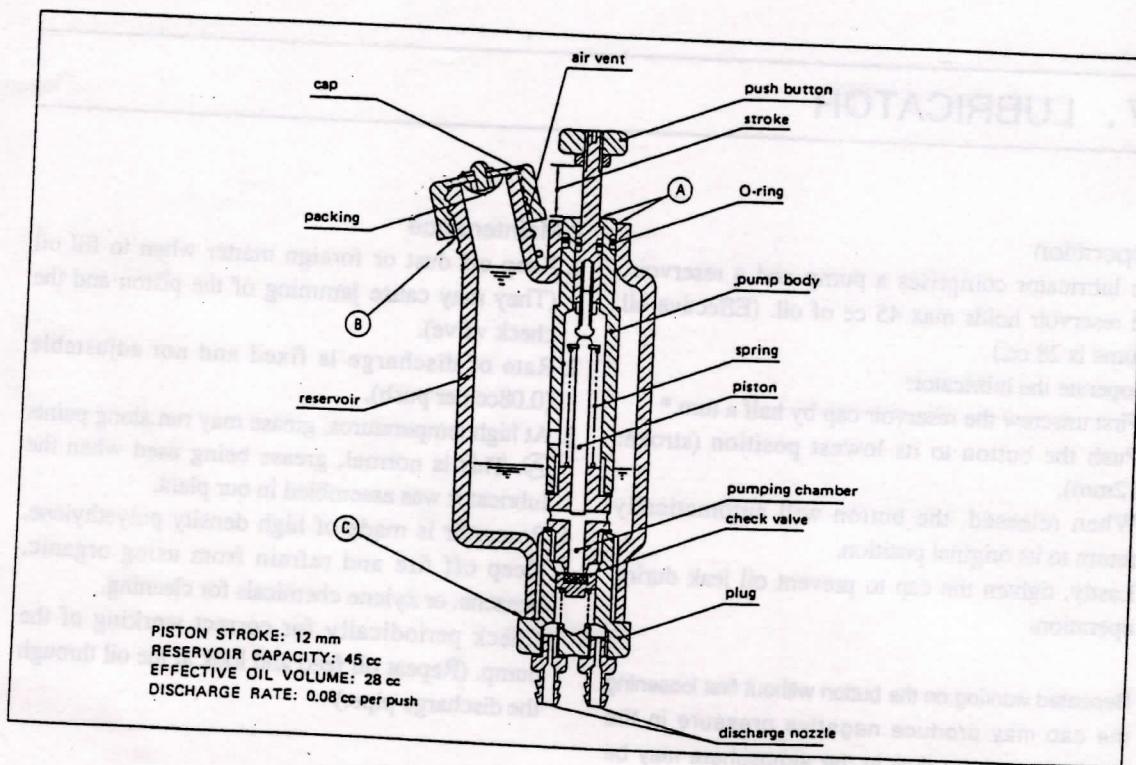

8. ORDERING PARTS

The parts list showing all the parts used in the machine is included in this book.

Check the list, and specify parts numbers and quantities required clearly.

Send your order to the nearest agent, distributor or one of our branch offices.

1. Description of each part and its stamp number is described in this parts list.

Screws and nuts for parts are shown adjacent to the relevant parts. When ordering parts, describe clearly stamp number with its name of part.

2. The parts which have no Ref. Number can not be delivered independently; always order it as an assembly.

3. A set of assembled parts is represented by the stamp number of its main parts.

4. The last figure on the parts stamp number advances on each improvement of the parts.


5. Parts No. described in [] of Remarks means old parts No.

* The parts list is subject to change without prior notice.

CONTENTS

(1)	THREAD TENSION AND COVERS PARTS	10
(2)	BUSHING, OILINGS AND HANDLE PARTS.....	12
(3)	NEEDLE BAR, PRESSER BAR AND DRIVING PARTS	14
(4)	LOOPER DRIVING PARTS.....	16
(5)	FEED DRIVING AND THREAD CUTTER PARTS.....	18
(6)	MOTOR PARTS (For Totally Enclosed Type Motor)	20
(7)	SPECIAL PARTS.....	22
(8)	CREPE TAPE BINDING AND CUTTER PARTS (Special Order Parts)	24
	NUMERICAL INDEX OF PARTS	26
	DIAGRAM OF SCREW, NUT & WASHER.....	28


(1) THREAD TENSION AND COVER PARTS

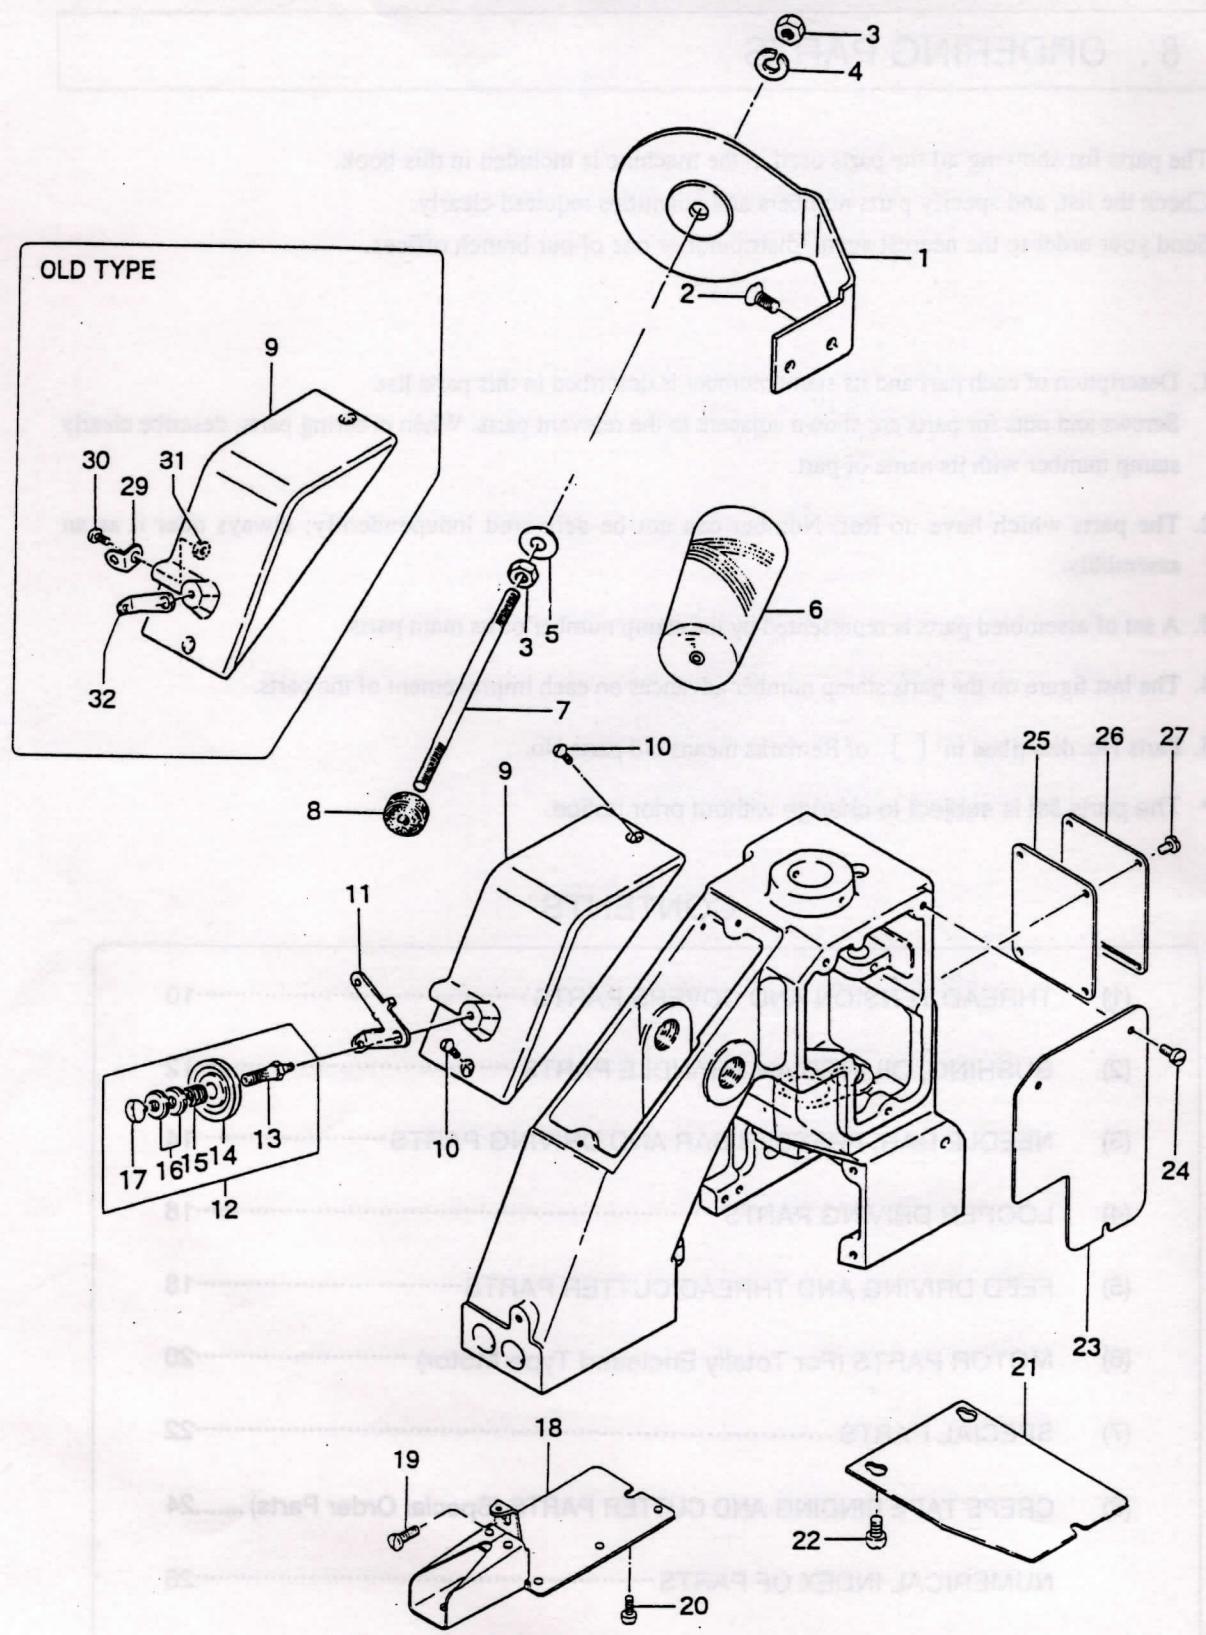

(1) THREAD TENSION AND COVER PARTS

Key No.	Part No.	Description	Q'ty	Remarks
1	245042	Thread Stand	1	
2	15/64S28028	Screw, for 245042	2	
3	1N6	Nut	2	
4	3W6	Spring Washer	1	
5	2W6	Washer	1	
6	K01001	Thread	1	
7	245052	Thread Cone Clamping Rod	1	
8	245201	Thread Cone Clamping Nut	1	
9	245014	Top Cover	1	
10	9/64S40005	Screw, for 245014	2	
11	245551	Thread Eyelet	1	
12	245081A	Thread Tension Assembly	1	(13~17)
13	245081	Tension Post	1	
14	065261	Tension Disc	2	
15	245101	Tension Spring	1	
16	245091	Tension Nut	2	
17	9/64S40011	Screw, for 245081A	1	
18	245033	Needle Bar Guard	1	
19	11/64S40005	Screw, for 245033	1	
20	9/64S40065	Screw, for 245033	2	
21	245222	Looper Cover	1	
22	9/64S40065	Screw, for 245222	3	
23	245022	Side Plate	1	
24	9/64S40005	Screw, for 245022	3	
25	245481	Gasket	1	
26	245302	Inside Cover	1	
27	9/64S40005	Screw, for 245302	4	
29	245261	Thread Eyelet	1	
30	11/64S40006	Screw, for 245261	1	
31	11/64N40102	Nut	1	
32	245071	Thread Tension Eyelet	1	Old Type


(2) BUSHINGS, OILINGS AND HANDLE PARTS

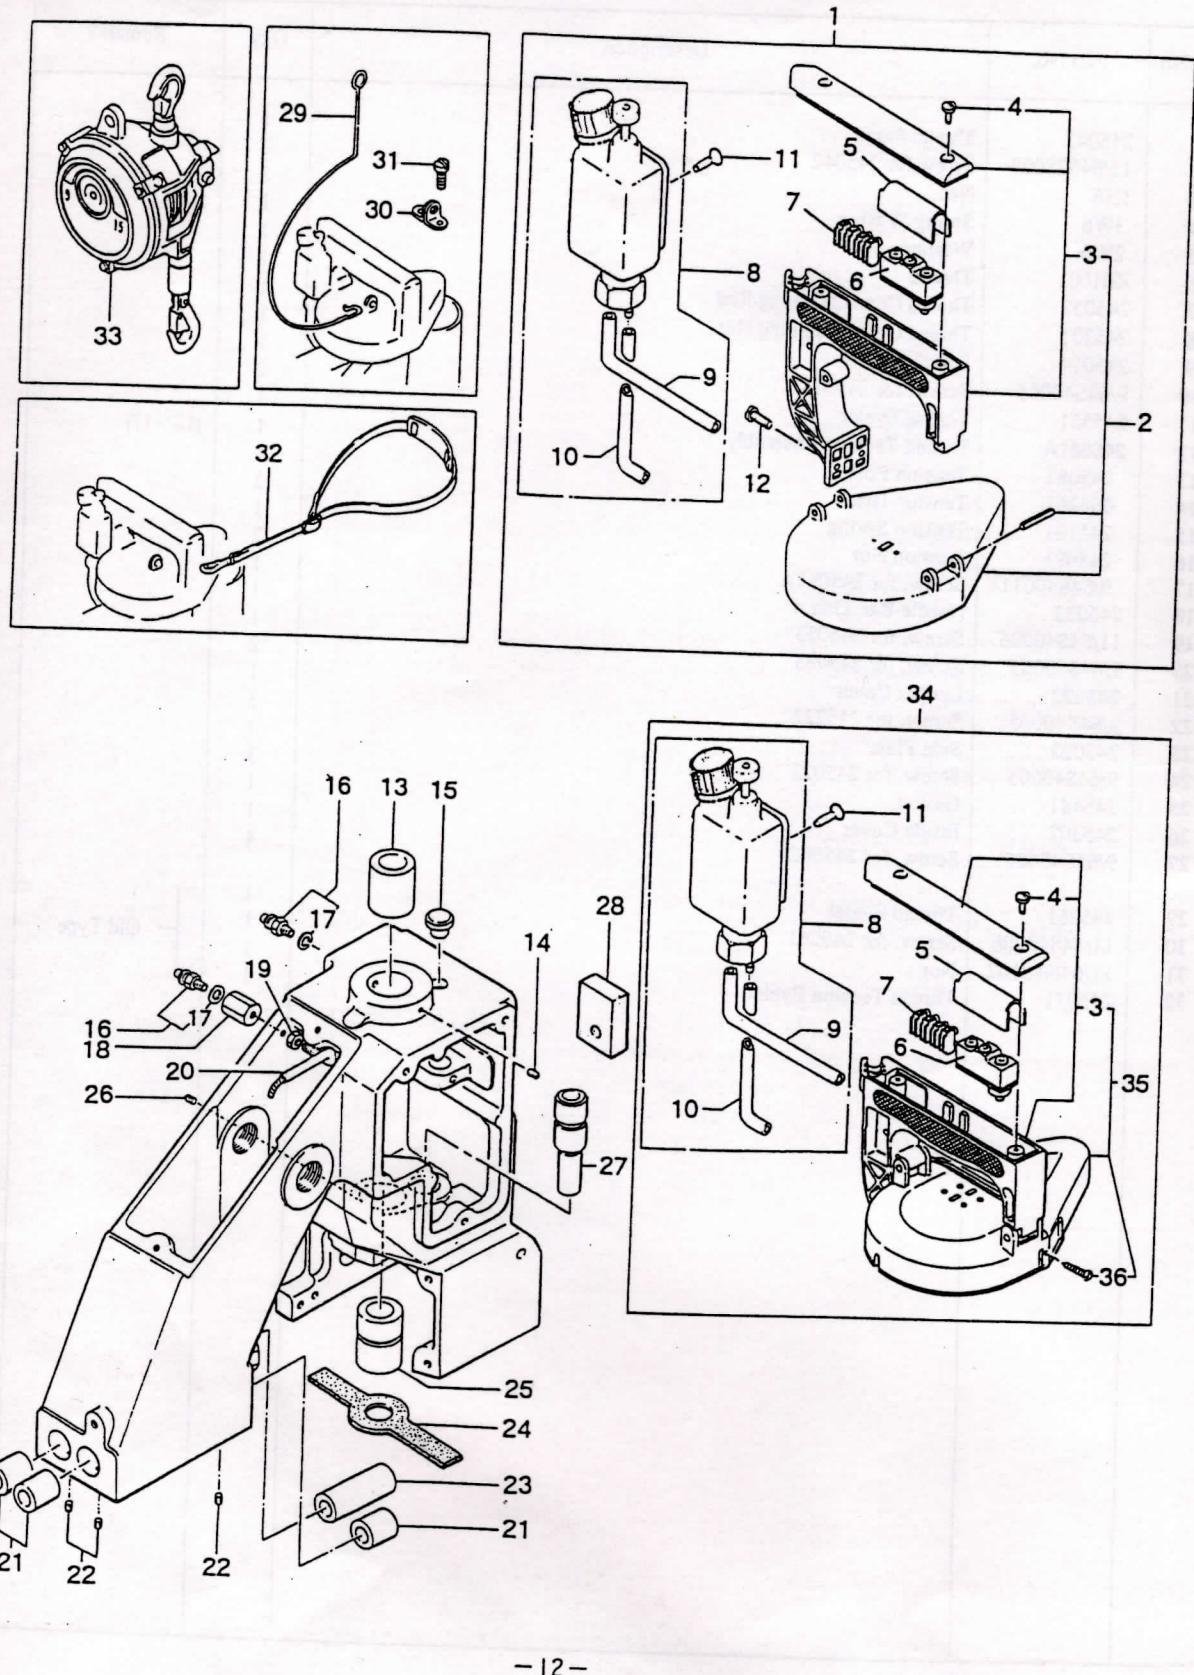

(2) BUSHINGS, OILINGS AND HANDLE PARTS

Key No.	Part No.	Description	Q'ty	Remarks
1	241024AS	Handle Assembly	1	2,5~11
2	241024A	Handle Assembly	1	(3,4)
3	241024	Handle	1	(4)
4	9/64S40011	Screw, for 241024A	2	
5	245132	Micro Switch Cover	1	
6	C02001	Micro Switch (Z-15GK655-B)	1	
	C02006	Micro Switch (X-10GD-B)	1	
7	C05008	Flexible Terminal Block (ML-SK-1,4P)	1	for DC motor
8	D03003	Oiler	1	
9	8FU2-6x90F	Oil Tube, with oil felt	1	
10	8FU2-6x60F	Oil Tube, with oil felt	1	
11	6S5x15	Screw, for D03003	1	
12	15/64S28021	Screw, for 241024A	2	
13	241122	Main Shaft Bushing, rear	1	
14	9/64S40502	Screw, for 241122	1	
15	065401	Rubber Bushing	1	
16	D07021	Joint (BN-5-6)	2	(17)
17	E03014	Washer	2	
18	245471	Joint	1	
19	1N4	Nut	1	
20	245461	Oil Pipe	1	
21	242212	Bushing for Presser Bar & Needle Bar, upper	3	
22	9/64S40502	Screw, for 242212	3	
23	242222	Presser Bar Bushing, lower	1	
24	245541	Oil Felt	1	
25	241111	Main Shaft Bushing, lower	1	
26	9/64S40502	Screw, for 241111	1	
27	243021	Looper Rocker Shaft Bushing	1	
28	245162	Oil Felt	1	
29	245271	Hanger	(1)	Special Order
30	241151	Hook	(1)	
31	1/8S40006	Screw, for 241151	(2)	
32	245171	Shoulder Belt	(1)	
33	EW-6.5	Spring Balancer	(1)	
34	241024BS	Handle Assembly (Safety type with pulley cover)	(1)	5~11,35
35	241024B	Handle Assembly (Safety type with pulley cover)	(1)	(3,4,36)
36	9S2.6x10	Screw, for 241024B	(1)	

(3) NEEDLE BAR, PRESSER BAR AND DRIVING PARTS

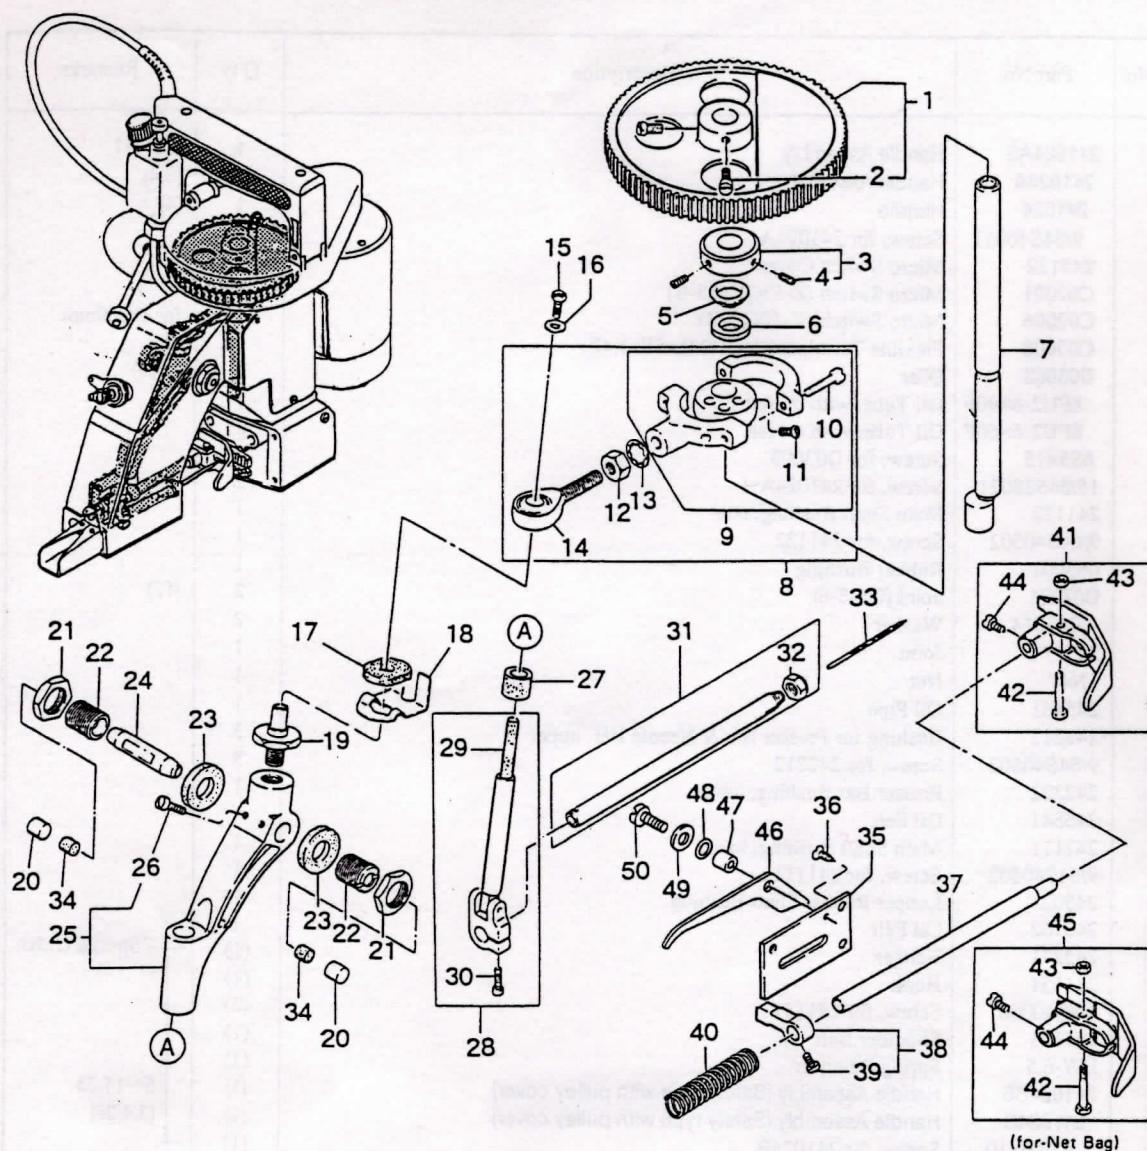


Key No.	Part No.	Description	Q'ty	Remarks
1	241092	Synchro Pulley	1	(2)
2	3/16S28001	Screw, for 241092	2	
3	241131	Retaining Collar	1	(4)
4	11/64S40502	Screw, for 241131	2	
5	241161	Spacer	1	
6	205131	Oil Felt	1	
7	241102	Main Shaft	1	
8	242011A	Connecting Rod Assembly	1	
9	242011	Connecting Rod Sub-Assembly	1	(9~14) (10,11)
10	3/16S28029	Screw, for connecting rod cap	2	
11	11/64S40001	Screw, for eccentric cam	2	
12	1N8	Nut, for 242011A	1	

(3) NEEDLE BAR, PRESSER BAR AND DRIVING PARTS

Key No.	Part No.	Description	Q'ty	Remarks
13	5W8	Washer, for 242011A	1	
14	6A04001	Rod End (POS-8)	1	
15	11/64S40084	Screw, for 242031	1	
16	11/64W15103	Washer, for 242031	1	
17	245211	Oil Felt	1	
18	242041	Spring	1	
19	242031	Rod End Stud	1	
20	245491	Cap	1	
21	5/8N18101	Nut, for 242081	2	
22	242081	Adjusting Stud	2	
23	245231	Oil Felt	2	
24	242071	Needle Bar Lever Stud	2	
25	242051A	Needle Bar Lever Assembly	1	
26	11/64S40004	Screw, for 242051A	1	(26)
27	245371	Oil Felt	2	
28	242101A	Needle Bar Connection Assembly	1	
29	205171	Oil Felt	1	(29,30)
30	11/64S40003	Screw, for 242101A	1	
31	242121A	Needle Bar with Nut	1	
32	242131	Needle Clamp Nut	1	(32)
33	B01002	Needle(DNx1 #25)	1	
34	065561	Oil Felt	1	
35	242172	Presser Foot Lifter Base	2	
36	11/64S40002	Screw, for 242172	1	
37	242201	Presser Bar	3	
38	242181	Presser Bar Connection	1	
39	11/64S40003	Screw, for 242181	1	(39)
40	242191	Presser Spring	1	
41	242231A	Presser Foot Assembly	1	
42	9/64S40055	Screw	1	(42~44)
43	9/64N40101	Nut	1	
44	11/64S40005	Screw, for 242231A, 242233A	1	
45	242233A	Presser Foot Assembly (for Net Bag)	1	
46	242161	Presser Foot Lifter	(1)	(42~44)
47	242271	Collar	(1)	Special Order
48	31LP6	"O" Ring	(1)	For Presser
49	11/64W15103	Washer	(1)	Bar Lifter
50	11/64S40009	Screw, for 242161	(1)	


(4) LOOPER DRIVING PARTS

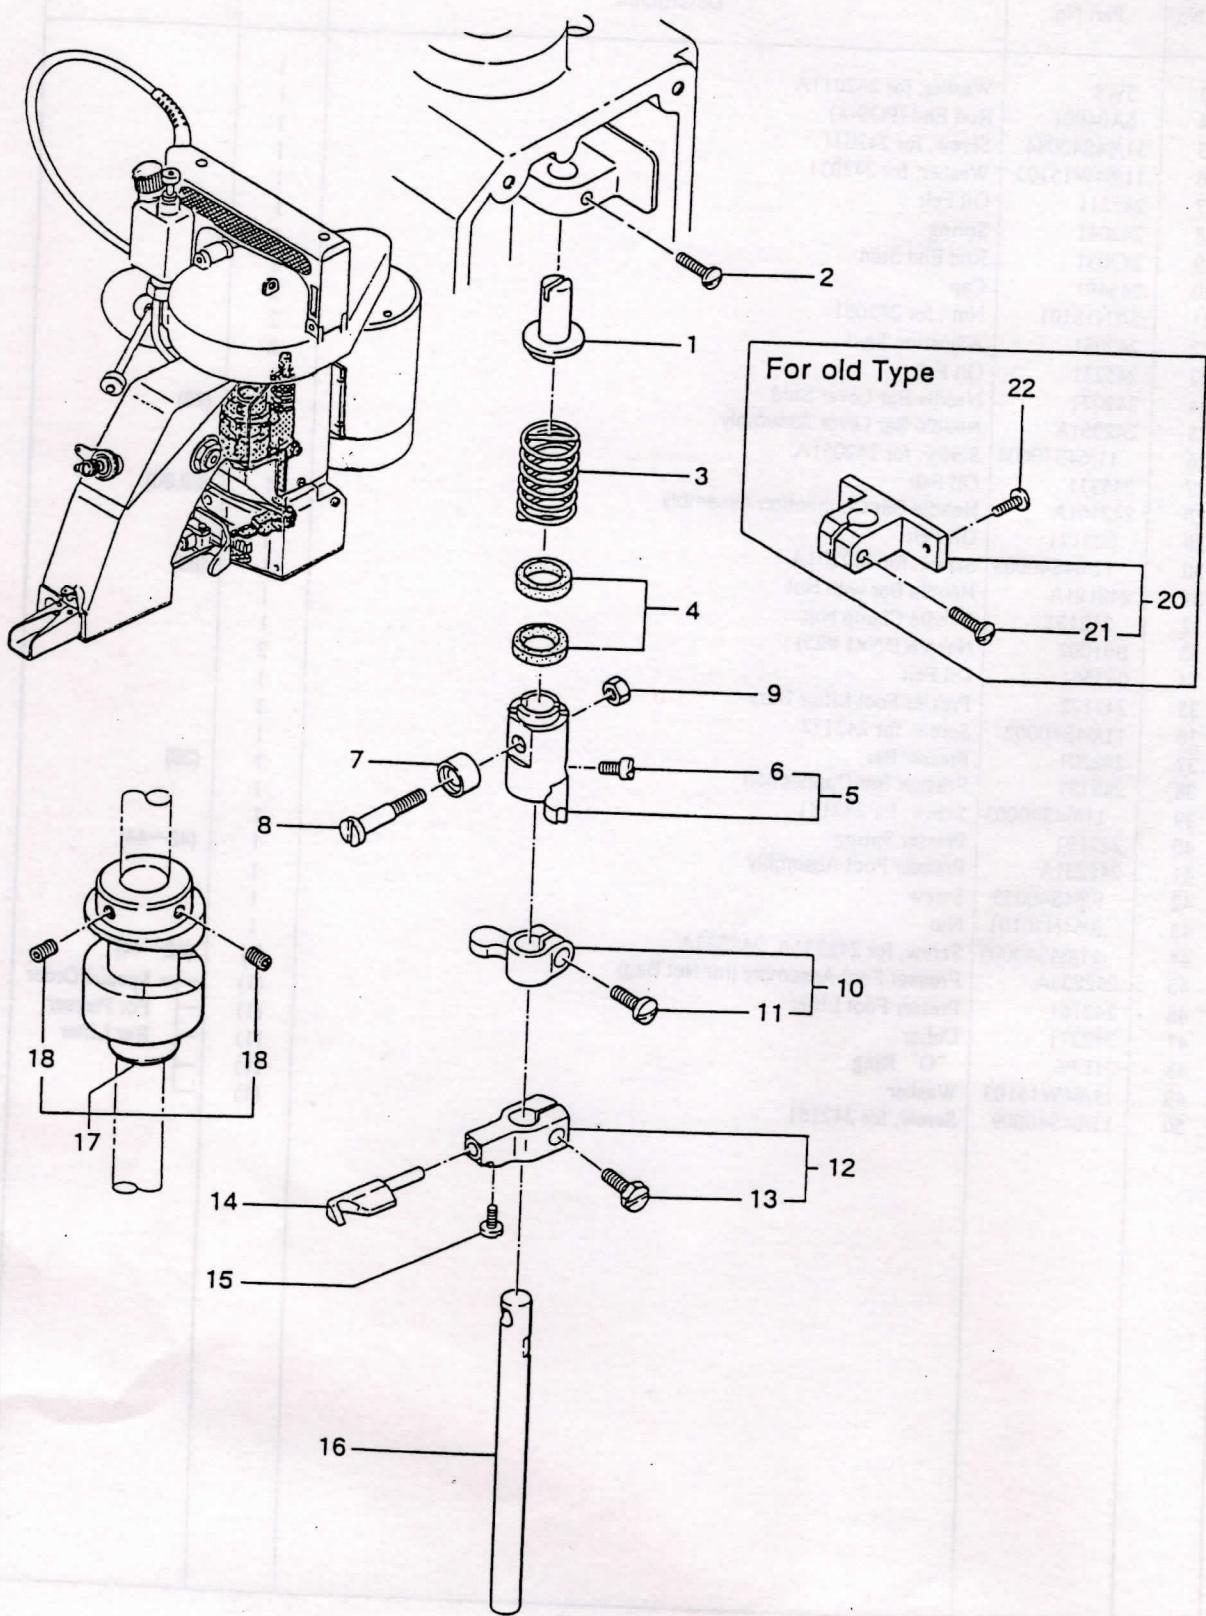

(4) LOOPER DRIVING PARTS

Key No.	Part No.	Description	Q'ty	Remarks
1	243121	Spring Supporter	1	
2	11/64S40003	Screw, for 243121	1	
3	243131	Spring	1	
4	205131	Oil Felt	2	
5	243071	Looper Rocker Shaft Arm (A)	1	(6)
6	11/64S40002	Screw, for 243071	1	
7	243041	Roller	1	
8	243061	Roller Stud Screw	1	
9	11/64N40201	Nut, for 243061	1	
10	243081	Looper Rocker Shaft Arm (B)	1	(11)
11	11/64S40009	Screw, for 243081	1	
12	243092	Looper Rocker	1	(13)
13	11/64S40089	Screw, for 243092	1	
14	243102	Looper	1	
15	9/64S40001	Screw, for 243102	1	
16	243032	Looper Rocker Shaft	1	
17	243012	Looper Drive Cam	1	(18)
18	15/64S28524	Screw, for 243012	2	
20	243111	Spring Supporter Block	1	
21	9/64S40035	Screw, for 243111	1	
22	9/64S40005	Screw, for 243111	2	(21) for Old Type


(5) FEED DRIVING AND THREAD CUTTER PARTS

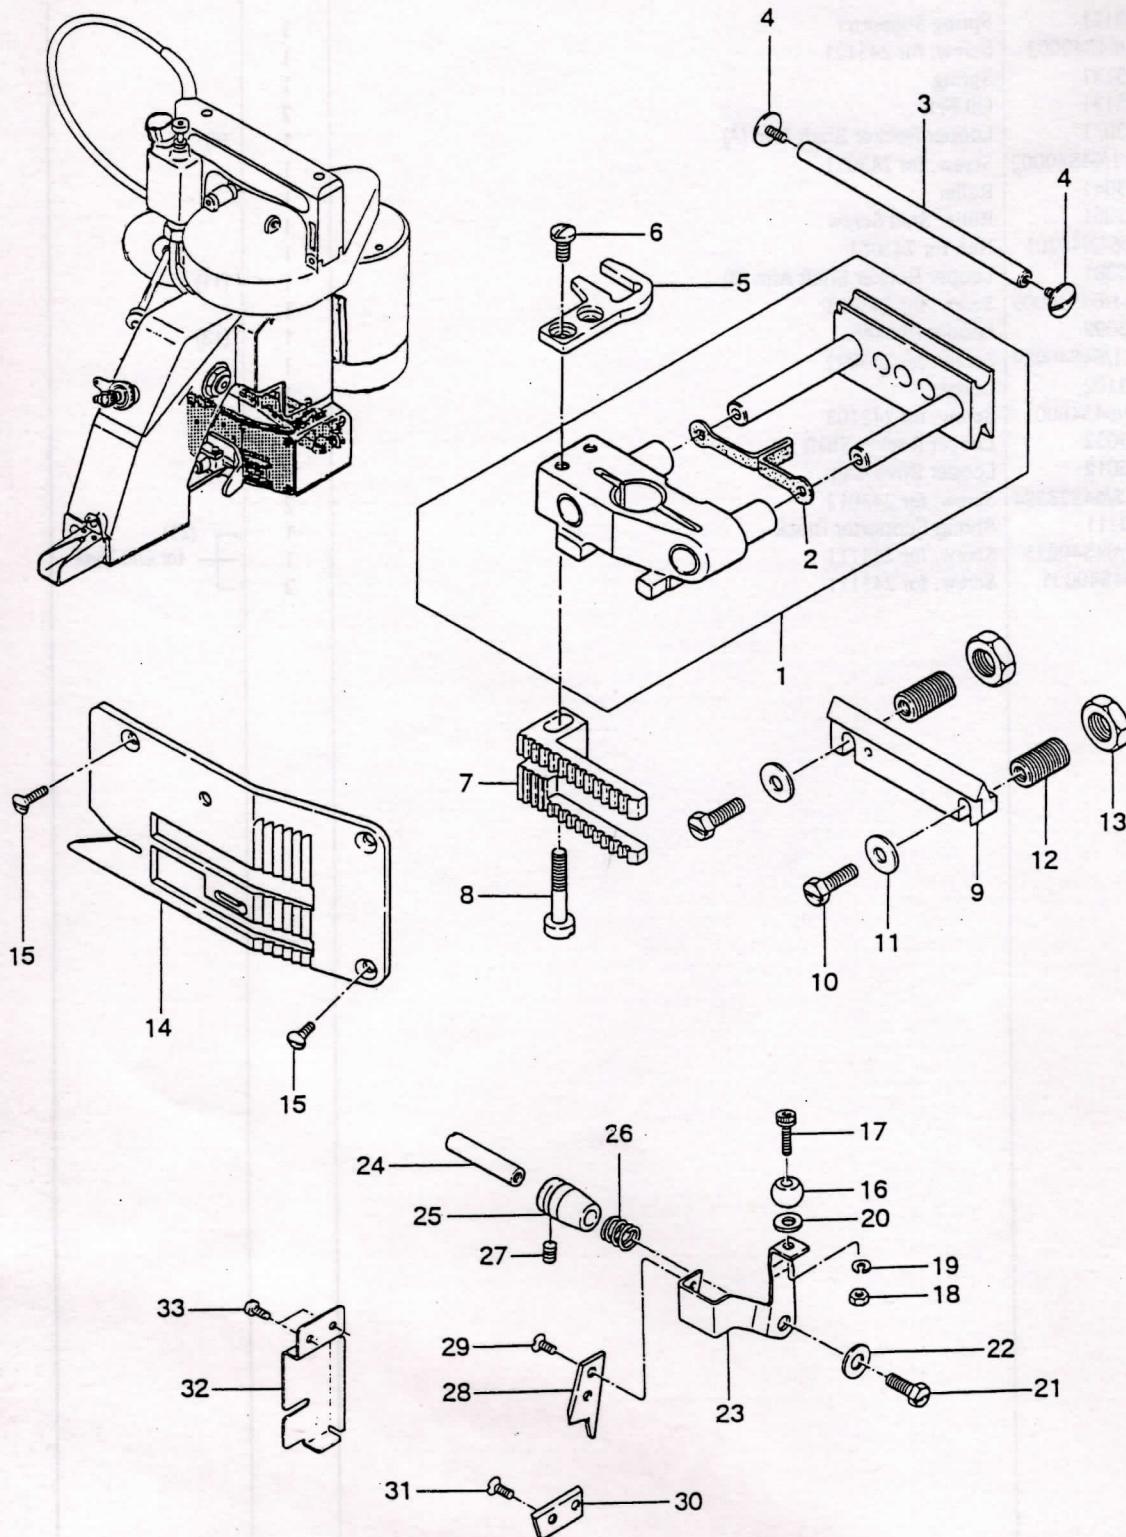

(5) FEED DRIVING AND THREAD CUTTER PARTS

Key No.	Part No.	Description	Q'ty	Remarks
1	244011A	Feed Dog Carrier Block Assembly	1	
2	245391	Oil Felt	1	
3	244102	Slide Block Guide Stud	1	
4	9/64S40011	Screw, for 244102	2	
5	246011	Knife Bracket Extension	1	
6	3/16S32031	Screw, for 246011	1	
7	244111	Feed Dog	2	
8	3/16S32034	Screw, for 244111	1	
9	244081	Slide Block Adjusting	1	
10	3/16S32025	Lock Bolt, for 244091	1	
11	11/64W15103	Washer, for 244091	2	
12	244091	Stud Slide Block Adjusting Support	2	
13	3/8N24201	Lock Nut, for 244091	2	
14	244122	Throat Plate	2	
15	9/64S40043	Screw, for 244122	1	
16	246081	Ball	3	
17	4B3×12	Bolt, for 246081(M3×0.5×12ℓ)	1	
18	1N3	Nut, for 246081(M3×0.5)	1	
19	3W3	Spring Lock Washer(M3)	1	
20	1W3	Washer, for 246081(M3)	1	
21	11/64S40049	Screw, for 246021	1	
22	11/64W15103	Washer, for 246021	1	
23	246021	Knife Bracket	1	
24	246032	Knife Bracket Pin	1	
25	246042	Bushing, for 246032	1	
26	246051	Knife Tension Spring	1	
27	9/64S40502	Screw, for 246042	1	
28	246061	Knife Moving	1	
29	1/8S40003	Screw, for 246061	1	
30	246071	Knife Stationary	2	
31	1/8S40003	Screw, for 246071	1	
32	245561	Knife Cover	2	
33	1/8S40006	Screw, for 245561	1	
			2	

(6) MOTOR PARTS (For Totally Enclosed Type Motor)

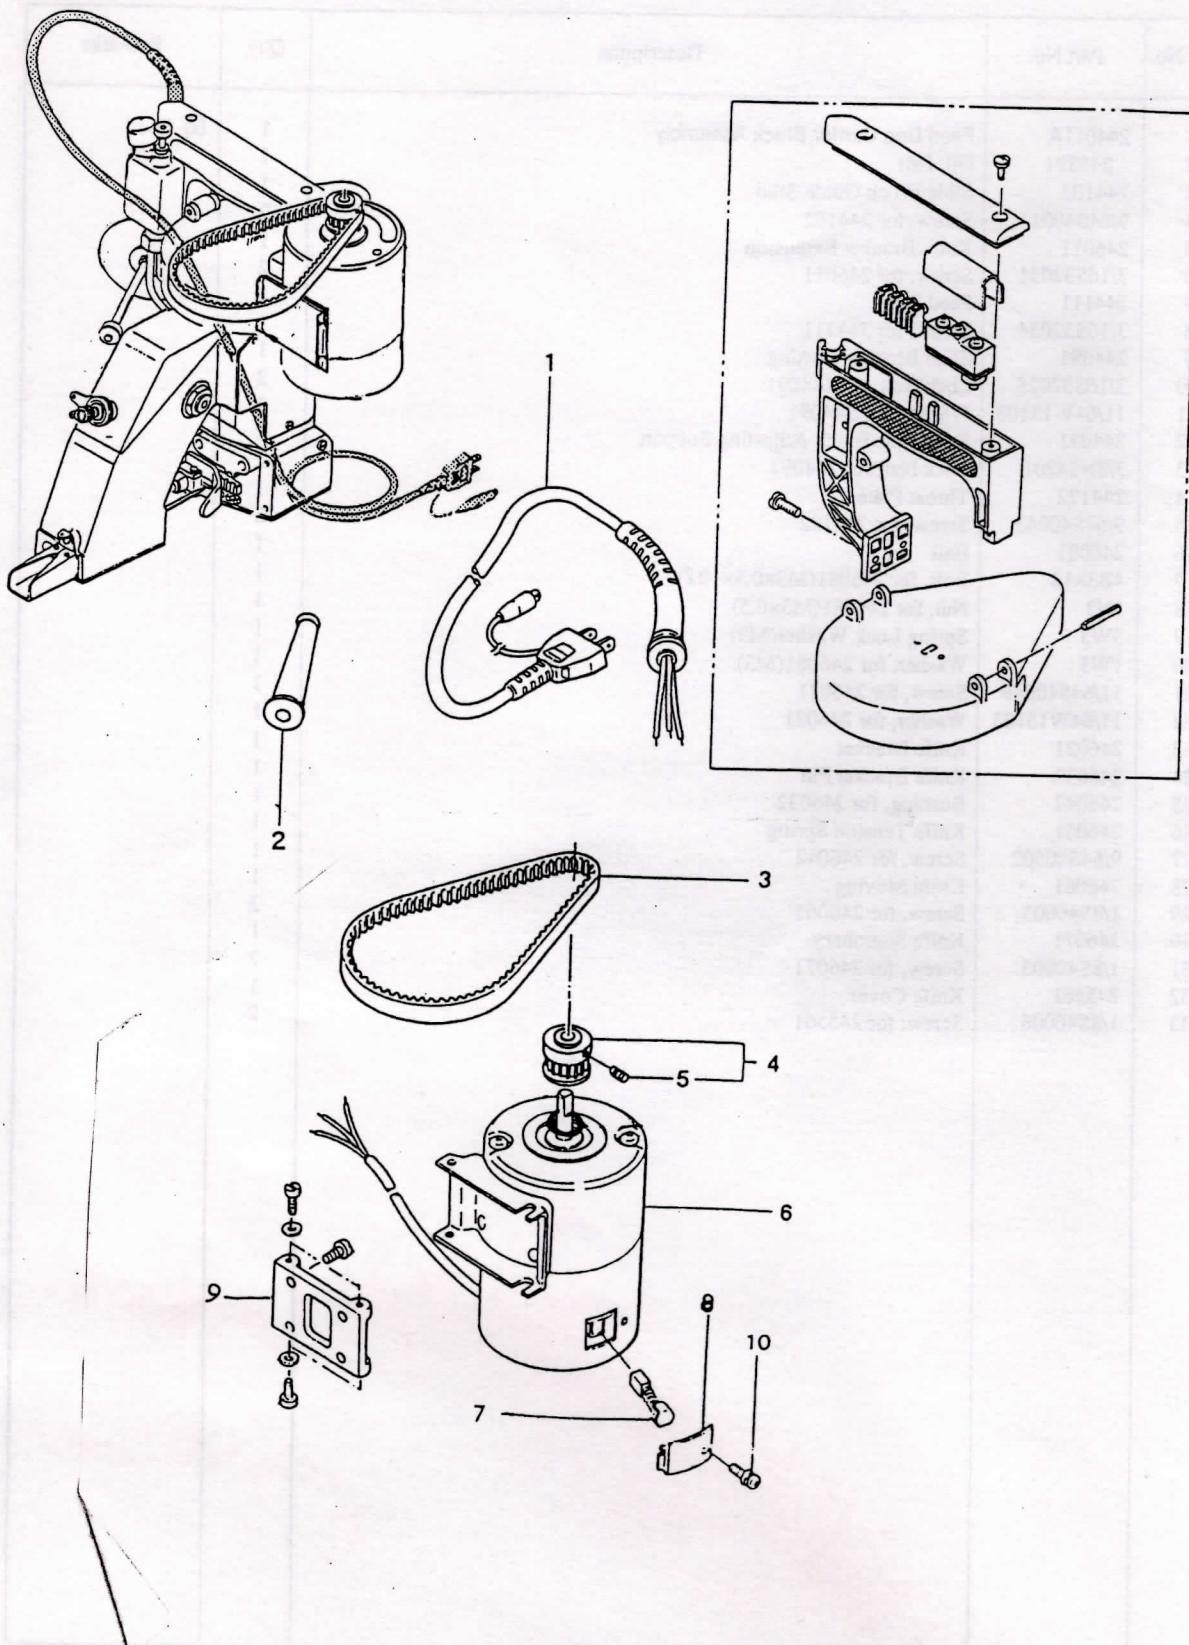

(6) MOTOR PARTS (For Totally Enclosed Type Motor)

Key No.	Part No.	Description	Q'ty	Remarks
1	C04001	Cabtyer Cord, with Plug(Standard Type)	1	
	C04003	Cabtyer Cord, with Plug(American Type)	1	
	C04004	Cabtyer Cord, with Plug(British Type)	1	
	C04005	Cabtyer Cord, with Plug(German Type)	1	
	C04006	Cabtyer Cord, with Plug(French Type)	1	
	C04007	Cabtyer Cord, with Plug(Australian Type)	1	
	C04009	Cabtyer Cord, with Plug(for DC Motor)	1	
2	211151	Rubber Bushing (for C04003-C04007)	1	
3	F01001	Timing Belt	1	
4	241083	Motor Pulley	1	(5)
5	11/64S40504	Screw, for 241083	2	
6	C01021	Universal Motor (220V)	1	(7,8)
	C01022	Universal Motor (240V)	1	(7,8)
	C01023	Universal Motor (110V)	1	(7,8)
7	C08008	Carbon Brush, for AC Motor	2	
8	C07004	Cap	2	
9	241074	Motor Base	1	
10	15/64S28004	Screw, for 2410704	4	
11	13S5×10	Screw for Motor	4	

(7) SPECIAL PARTS

Key No.	Part No.	Description	Q'ty	Remarks
1	241024	Handle	1	
2	9/64S40011	Screw	2	(2)
3	241212	Pulley Cover	1	
4	9/64S40004	Screw, for 241053	2	
5	9/64S40052	Screw, for 241053	1	
6	241242	Pulley Cover Holder A	1	
7	15/64S28004	Screw, for 241242	1	
8	241231	Pulley Cover Holder B	2	
9	9/64S40005	Screw, for 241231	1	
10	241223	Handle Base	1	
11	15/64S28032	Screw, for 241253	1	
12	241253	Handle Base Holder	2	
13	D07021	Joint(BN-5-6)	1	
14	E03014	Washer	2	(14)
15	D07021	Joint(BN-5-6)	4	
16	8FU2-6×95F	Oil Tube (φ 6×95ℓ), with oil felt	2	(14)
17	8FU2-6×70F	Oil Tube (φ 6×70ℓ), with oil felt	2	
18	D07022	Joint	1	
19	D07023	Compression Sleeve	1	
20	D07024	Compression Bushing	1	
21	8FN2-4×135K	Oil Tube (φ 6×70ℓ), with oil wick	1	
22	245462	Oil Pipe	1	
23	D07009	Tube Clip (PC-4-1)	1	
24	9/64S40005	Screw, for D07009	1	

NUMERICAL INDEX OF PARTS

PART NO.	PAGE	PART NO.	PAGE	PART NO.	PAGE	PART NO.	PAGE
065261	11-14	242261A	25-40	2245461	13-20		
065401	13-15	242271	15-47	45462	23-22		
065561	15-34	243012	17-17	245471	13-18		
183261	25-33	243021	13-27	245481	11-25		
205131	14-6,17-4	243032	17-16	245491	15-20		
205171	15-29	243041	17-7	245541	13-24		
211151	21-2	243061	17-8	245551	11-11		
241024	13-3,23-1	243071	17-5	245561	19-32		
241024A	13-2	243081	17-10	246011	19-5		
241024AS	13-1	243092	17-12	246021	19-23		
241024B	13-35	243102	17-14	246032	19-24		
241024BS	13-34	243111	17-20	246042	19-25		
241074	21-9	243121	17-1	246051	19-26		
241083	21-4	243131	17-3	246061	19-28		
241092	14-1	244011A	19-1	246071	19-30		
241111	13-25	244081	19-9	246081	19-16		
241102	14-7	244091	19-12	247001	25-31		
241122	13-13	244102	19-3	247011	25-30		
241131	14-3	244111	19-7	247021	25-29		
241151	13-30	244122	19-14	247031	25-20	D03003	13-8
241161	14-5	244132	25-11	247041	25-23	D07009	23-23
241212	23-3	244133	25-37	247051	25-13	D07021	13-16,23-13
241223	23-10	245014	11-9	247052	25-38		23-15
241231	23-8	245022	11-23	247061	25-17	D07022	23-18
241242	23-6	245033	11-18	247063	25-39	D07023	23-19
241253	23-12	245042	11-1	247071	25-1	D07024	23-20
242011	14-9	245052	11-7	247073	25-34	F01001	21-3
242011A	14-8	245071	11-32	247081	25-6	K01001	11-6
242031	15-19	245081A	11-12	247082	25-36	8FN2-4x135K	23-21
242041	15-18	245081	11-13	247091	25-2	8FU2-6x60F	13-10
242051A	15-25	245091	11-16	247092	25-35	8FU2-6x70F	23-17
242071	15-24	245101	11-15			8FU2-6x90F	13-9
242081	15-22	245132	13-5			8FU2-6x95F	23-16
242101A	15-28	245162	13-28			EW-6.5	13-33
242121A	15-31	245171	13-32			31LP6	15-48
242131	15-32	245181	11-28				
242161	15-46	245201	11-8				
242172	15-35	245211	15-17				
242181	15-38	245222	11-21				
242191	15-40	245231	15-23				
242201	15-37	245261	11-29				
242212	13-21	245271	13-29				
242222	13-23	245302	11-26				
242231A	15-41	245371	15-27				
242233A	15-45	245391	19-2				

NUMERICAL INDEX OF PARTS

PART NO.	PAGE	PART NO.	PAGE	PART NO.	PAGE	PART NO.	PAGE
SCREW							
1/8S40003	19-29,19-31	15/64S28524	17-18				
	25-32	4B3x12	19-17				
1/8S40006	13-31,19-33	6S5x15	13-11				
		9S2.6x10	13-36				
		13S5x10	21-11				
3/16S28001	14-2	NUT					
3/16S28029	14-10	1N3	19-18				
3/16S32025	19-10	1N4	13-19				
3/16S32026	25-28	1N6	11-3,25-4				
3/16S32031	19-6						
3/16S32034	19-8	1N8	14-12				
9/64S40001	17-15	3/8N24201	19-13				
9/64S40004	23-4	5/8N18101	15-21				
9/64S40005	11-10,11-24	9/64N40101	15-43,25-15				
	11-27,17-22	11/64N40102	11-31				
	23-9,23-24						
9/64S40011	11-17,13-4	11/64N40201	17-9				
	19-4,23-2	11/64N40203	25-10				
9/64S40035	17-21,25-3	15/64N28206	25-24				
9/64S40043	19-15,25-12	WASHER					
	25-14	1W3	19-20				
9/64S40052	23-5	2W4	25-16,25-19				
9/64S40054	25-18	2W6	11-5,25-5				
9/64S40055	15-42		25-26				
9/64S40065	11-20,11-22	3W3	19-19				
9/64S40502	13-14,13-22						
	13-26,19-27	3W6	11-4,25-25				
11/64S40001	14-11	5W8	15-13				
11/64S40002	15-36,17-6	1/4W03205	25-8				
11/64S40003	15-30,15-39	1/4W15105	25-9				
	17-2	11/64W10101	25-22				
11/64S40004	15-26						
11/64S40005	11-19,15-44	11/64W15103	15-16,15-49				
11/64S40006	11-30		19-11,19-22				
11/64S40009	15-50,17-11	E03014	13-17,23-14				
11/64S40015	25-7						
11/64S40029	25-27						
11/64S40046	25-21						
11/64S40049	19-21						
11/64S40084	15-15						
11/64S40089	17-13						
11/64S40502	14-4						
11/64S40504	21-5						
15/64S28004	21-10,23-7						
15/64S28021	13-12						
15/64S28028	11-2						
15/64S28032	23-11						

SCREW , NUT & WASHER

ネジ、ナット、ワッシャー


FULL SIZE (原寸)



9/64S40502 11/64S40502 11/64S40504 15/64S28524 1/8S40006 9/64S40001 9/64S40004 9/64S40052 9/64S40054




9/64S40011 9/64S40065 9/64S40005 9/64S40035 11/64S40029 11/64S40001 11/64S40002 11/64S40009 11/64S40006




11/64S40046 11/64S40003 11/64S40004 11/64S40005 3/16S32031 15/64S28004 15/64S28021 15/64S28032 11/64S40084




1/8S40003 9/64S40043 11/64S40007 15/64S28028 11/64S40015 3/16S28001 3/16S32026 3/16S28029 3/16S32034



1/64S40055 11/64S40049 11/64S40075 11/64S40089 3/16S32025 4B3x12 1S3/16-32x9 FC103238 6S5x15



9/64N40101 11/64N40201 11/64N40203 15/64N28206 3/8N24201 5/8N18101 1N3 1N4 1N6 1N8



1/64N40102 11/64W10101 11/64W15103 1/4W03205 1/4W15105 1W3 2W4 2W6 3W6 5W8 E03014